


Five Easy Steps for Applying U-NEEK™ Shaft Scraper



1. Carefully remove the old grip using a razor or sharp knife. Be careful not to damage the shaft.



2. Press the butt end of the shaft onto a mouse pad or scrap of old carpet to keep it from slipping. Place the U-NEEK™ Shaft Scraper on the shaft. If the shaft is a larger diameter than normal (bubble shaft, big butt, etc) adjust the angle of the scraper to prevent it from getting stuck on the sides of the shaft.

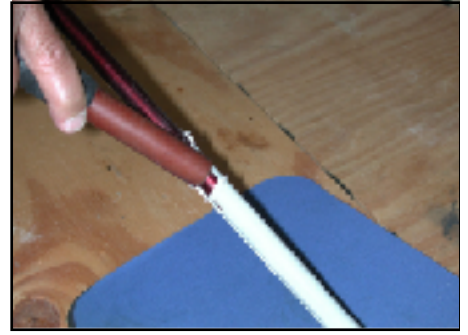

3. Push the scraper down the shaft removing the tape as you go.



4. After each pass rotate the shaft to start a new section.



5. After all the tape has been scraped down to the end remove the tape from the shaft. You now have a clean golf shaft ready for new tape.